



GULLY GRATING AND FRAME

CA1020C GRIL CAN.L 1M NF CHANNEL GRATING

Class C250
EN124-2 : 2015
EN GJS 500-7 Iron
ISO 1083 / EN1563

DESIGN FEATURES :



- **Material(s) :**
SG Iron to ISO 1083 / EN1563, Grade 500-7.
- **Design load :**
250 kN to EN124. Group 3 installation area - for gully tops located in kerbside channels of roads which when measured from the kerb edge, extend a maximum of 0,5 m into the carriageway and a maximum of 0,2 m into the footway.
- **Coating :**
Non toxic waterbased black paint.
- **Product Certification :**
NF Mark
This quality mark certifies conformity to the 'NF' regulation 110 and other additional features as highlighted (☞) by the authorising body AFNOR CERTIFICATION, 11, rue Francis de Pressensé F-93571 LA PLAINE SAINT DENIS CEDEX

SPECIAL FEATURES :

- **Grating type :**
Flat grating for duct
Depth of insertion : e= 27 mm.
- **Surface finish :**
Bars special design provides maximum water drainage
- **Waterway :**
Waterway $\geq 30\%$: 985 cm².
- **Mass :**
Grating : 14.2 kg.

CIVIL ENGINEERING :

- Suitable for 1 m long prefabricated concrete ducts
- **Remark(s) :**
Ductile frame bars can be substituted for 30x30x3 mm galvanized steel sections

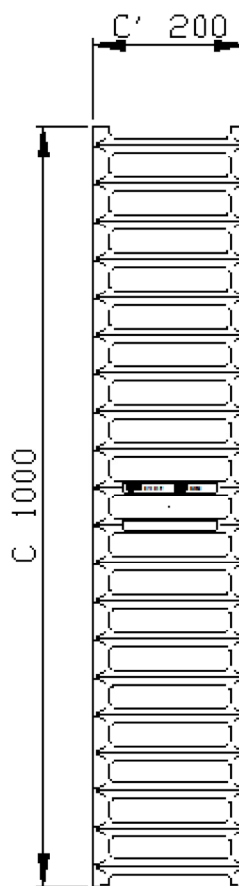

- (☞) Certified characteristics.
- Weights (kg) provided are the medium values detected during production of separate product parts with application of 10% of tolerance / Dimensions (mm) and drawings provided for your guidance.
- We reserve the right to modify specifications without prior notice / Uncontrolled distribution.

CONFIDENTIAL
Property of EJ EMEA
Not to be used without permission.

EJ
ZI De Marivaux | Saint-Crépin Ibouvillers |
BP50409 | 60544 Méru Cedex | France

ISO 9001 - ISO 14001 - ISO 45001 - ISO 50001

ejco.com

Data sheet :
FT_510709
Date updated :
01.03.2021
Printed : 05.03.2021